




NENMMAN 上曼电气

机械联锁 Mechanical interlock




⚠ IP 44 CEE/IEC 插座，带开关，带机械联锁

A	P	110V	230V	400V	500V	>50-500V	
		50Hz/60Hz 3P 4P 5P 4H 4H 4H	50Hz/60Hz 3P 4P 5P 6H 9H 9H	50Hz/60Hz 3P 4P 5P 9H 6H 6H	50Hz/60Hz 3P 4P 5P 7H 7H 7H	100-300Hz 3P 4P 5P 10H 10H 10H	300-500Hz 3P 4P 5P 2H 2H 2H
16	3	MXS-P134-4	MXS-P134-6	MXS-P134-9	MXS-P134-7		
16	4	MXS-P144-4	MXS-P144-9	MXS-P144-6	MXS-P144-7		
16	5	MXS-P154-4	MXS-P154-9	MXS-P154-6	MXS-P154-7		
32	3	MXS-P234-4	MXS-P234-6	MXS-P234-9	MXS-P234-7		
32	4	MXS-P244-4	MXS-P244-9	MXS-P244-6	MXS-P244-7		
32	5	MXS-P254-4	MXS-P254-9	MXS-P254-6	MXS-P254-7		

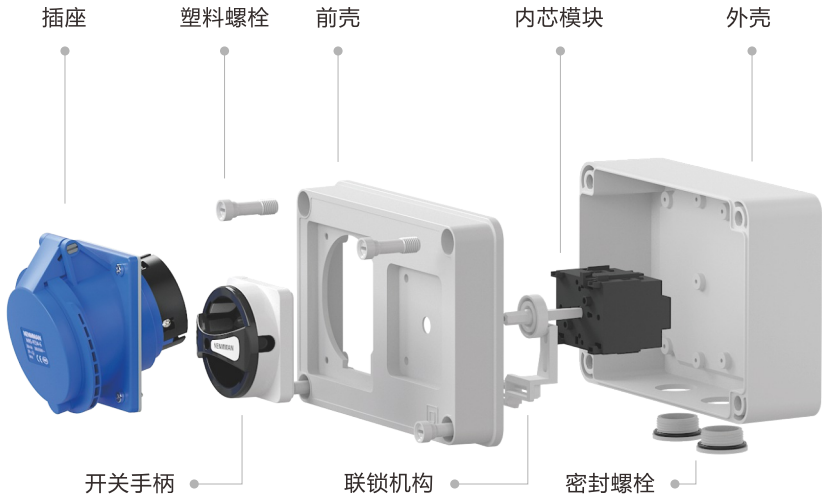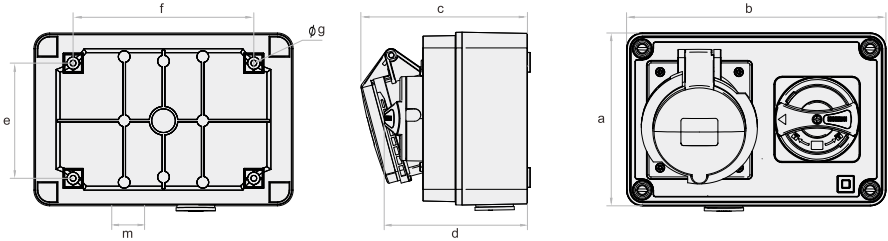


电流(A)		16			32		
级数(P)		3	4	5	3	4	5
尺寸	a	132	132	132	132	132	132
	b	198	198	198	198	198	198
	c	119	120	121	127	127	128
	d	109.5	109.5	109.5	109.5	109.5	109.5
	e	88	88	88	88	88	88
	f	138	138	138	138	138	138
	g	4.5	4.5	4.5	4.5	4.5	4.5
	m	25	25	25	25	25	25
最大电缆直径(mm)		25	25	25	25	25	25
导线横截面积(mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大		-4	-4	-4	-10	-10	-10
尾部进线尺寸范围 (mm)		9-16			13-18		




▲▲ IP 67 CEE/IEC 插座，带开关，带机械联锁

A	P	110V 50Hz/60Hz	230V 50Hz/60Hz	400V 50Hz/60Hz	500V 50Hz/60Hz	>50-500V	
		3P 4P 5P 4H 4H 4H	3P 4P 5P 6H 9H 9H	3P 4P 5P 9H 6H 6H	3P 4P 5P 7H 7H 7H	100-300Hz 3P 4P 5P 10H 10H 10H	300-500Hz 3P 4P 5P 2H 2H 2H
16	3	MXS-P136-4	MXS-P136-6	MXS-P136-9	MXS-P136-7		
16	4	MXS-P146-4	MXS-P146-9	MXS-P146-6	MXS-P146-7		
16	5	MXS-P156-4	MXS-P156-9	MXS-P156-6	MXS-P156-7		
32	3	MXS-P236-4	MXS-P236-6	MXS-P236-9	MXS-P236-7		
32	4	MXS-P246-4	MXS-P246-9	MXS-P246-6	MXS-P246-7		
32	5	MXS-P256-4	MXS-P256-9	MXS-P256-6	MXS-P256-7		

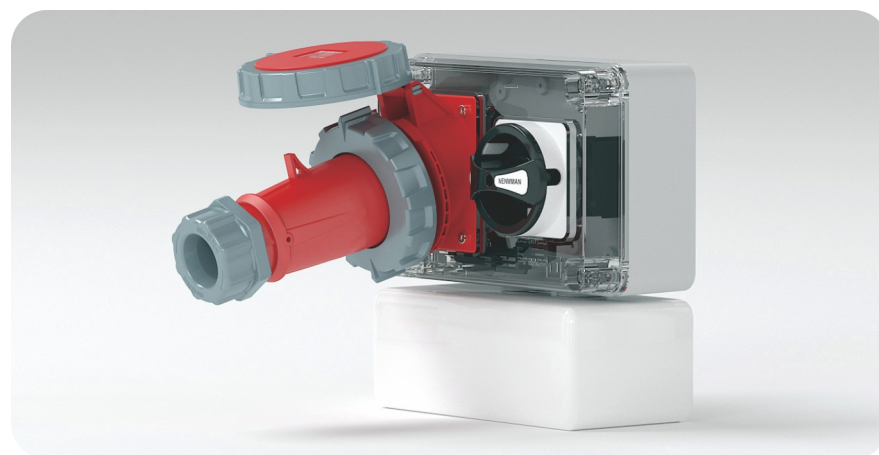

状态1：机械联锁开关处于OFF位置，无法旋转开关手柄。

状态2：插头插入，推动机械联锁锁顶，开关由OFF旋转至ON，接通电路，插头无法拔出。

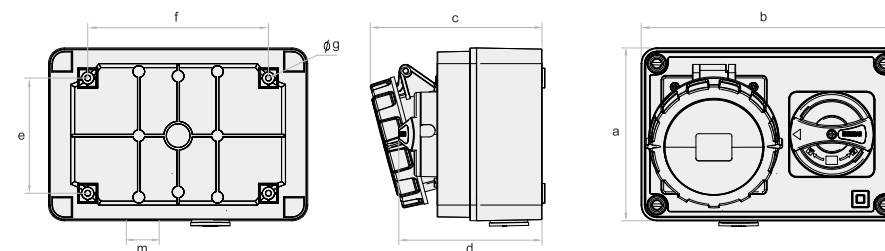

电流(A)		16			32		
级数(P)		3	4	5	3	4	5
尺寸	a	132	132	132	132	132	132
	b	198	198	198	198	198	198
	c	123.2	124.6	125.4	130.6	130.6	131.6
	d	109.5	109.5	109.5	109.5	109.5	109.5
	e	88	88	88	88	88	88
	f	138	138	138	138	138	138
	g	4.5	4.5	4.5	4.5	4.5	4.5
	m	25	25	25	25	25	25
最大电缆直径(mm)		25	25	25	25	25	25
导线横截面积(mm ²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大		-4	-4	-4	-10	-10	-10
尾部进线尺寸范围(mm)		9-16			13-18		